




Motorola V60i Keypad Replacement

Step-by-step guide to replacing your phone's keypad buttons.

Written By: Elizabeth OBrien

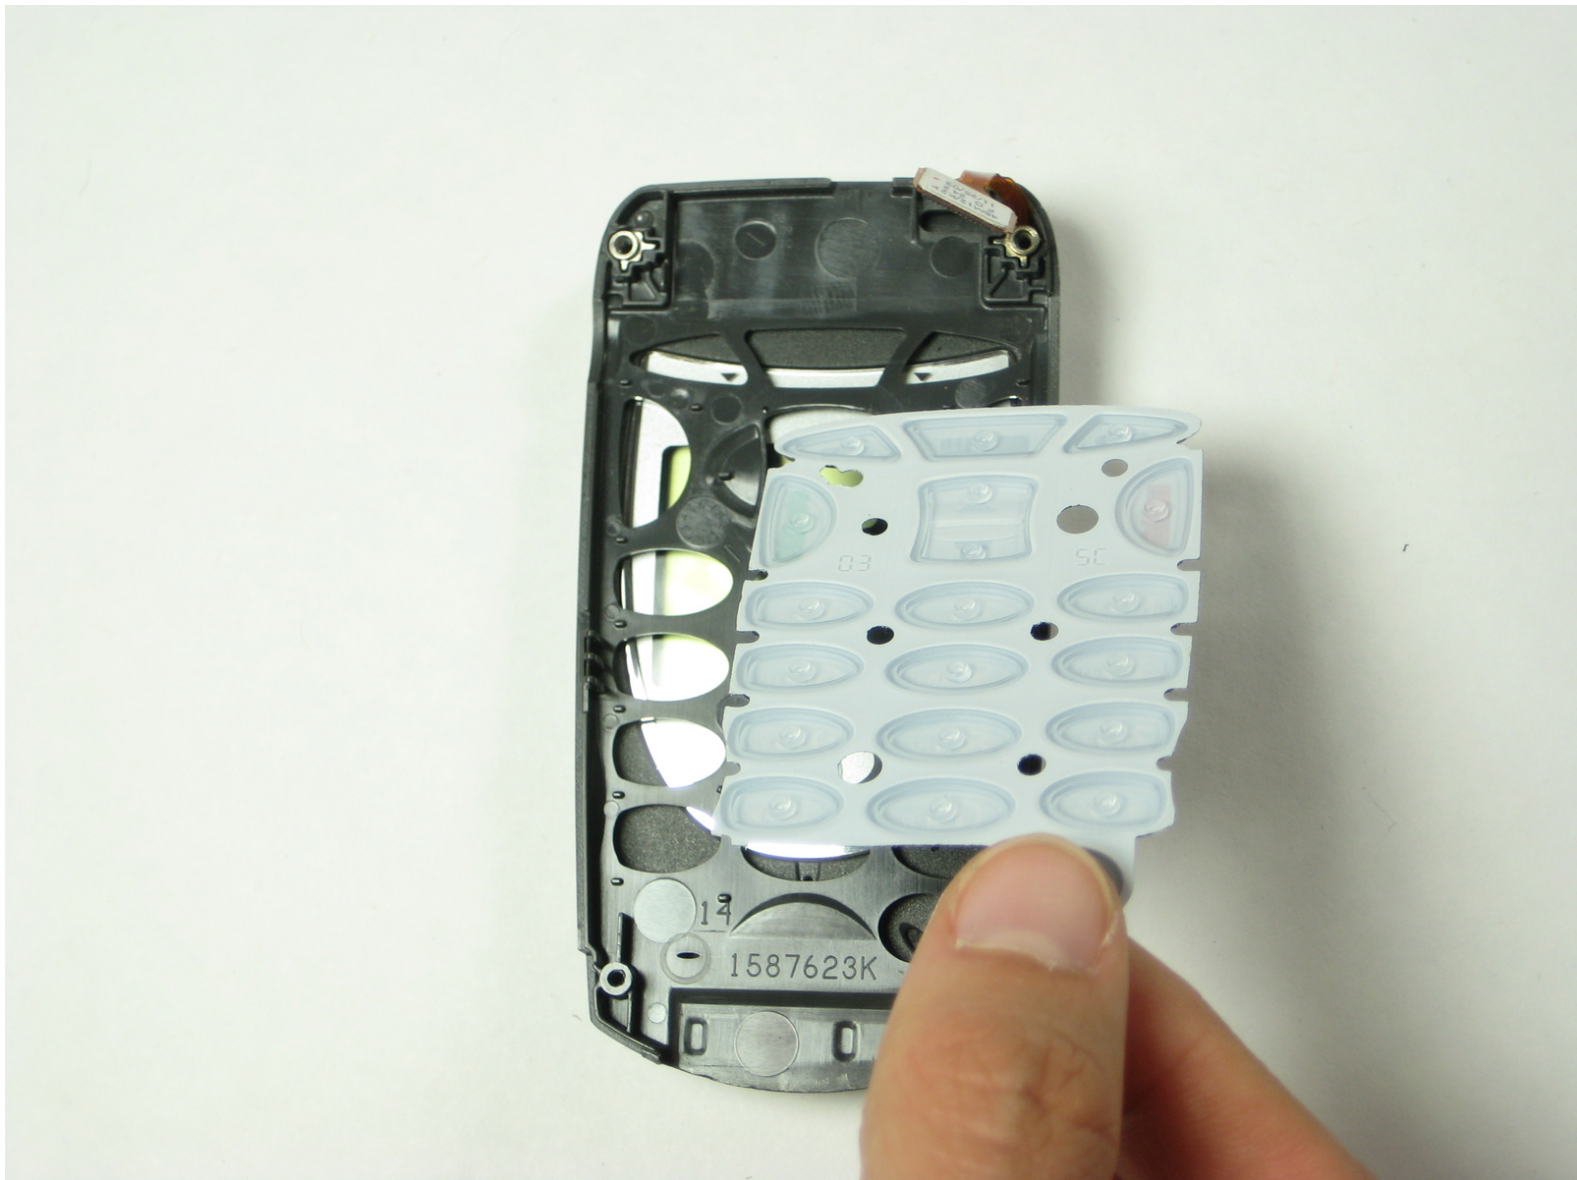

INTRODUCTION

Step-by-step guide to replacing your phone's keypad buttons.



TOOLS:

- [Spudger](#) (1)
 - [T6 Torx Screwdriver](#) (1)
-

Step 1 — Battery




- Flip phone to see back cover.
- Using either finger or spudger tool press button located near the top of phone by the antenna.

Step 2



- Pry up back plate from phone to reveal battery.
- Push button near bottom of battery using either your finger or the spudger. This will release the battery.

Step 3 — Back Plate

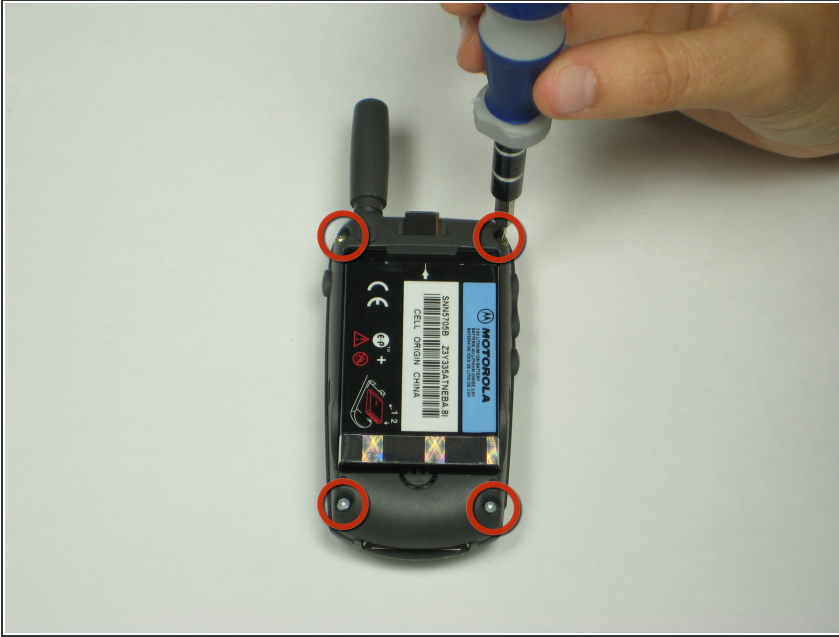


- Using a T6 Torx Screwdriver remove the four torxs on the back of the phone.

Step 4



- Simultaneously press indicated buttons on both sides of phone.

Step 5

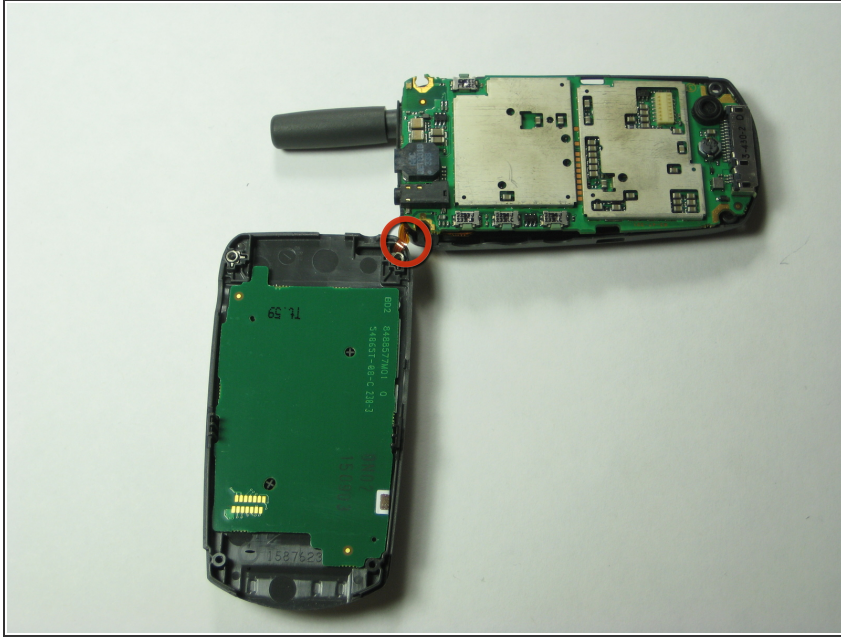

- Separate back plate from the rest of phone.


⚠ Make sure to not pull, there is a wire (circled on image) connecting the two plates.

Step 6 — Motherboard




- Gently lift logic board from back plate.

Step 7

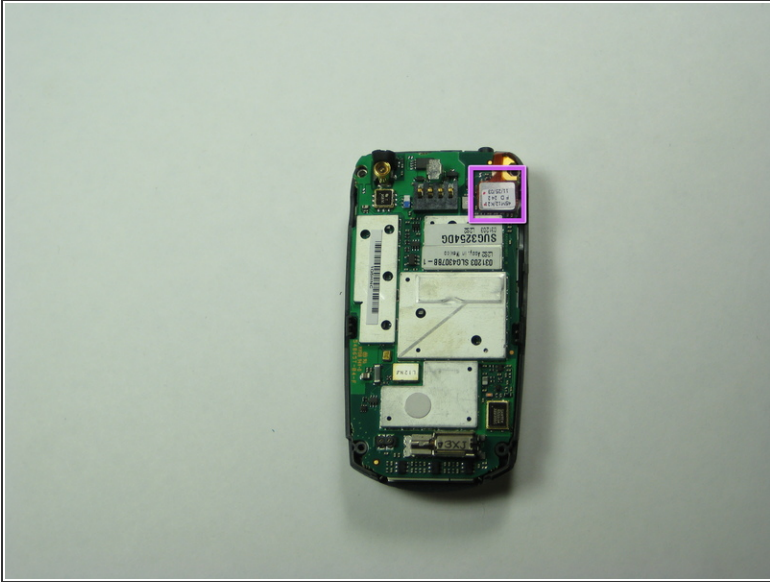

- Place logic board on front cover.
- Unsnap orange wire that connects the logic board to keypad sensor to allow the logic board to move freely.

Step 8 — Keypad Sensor

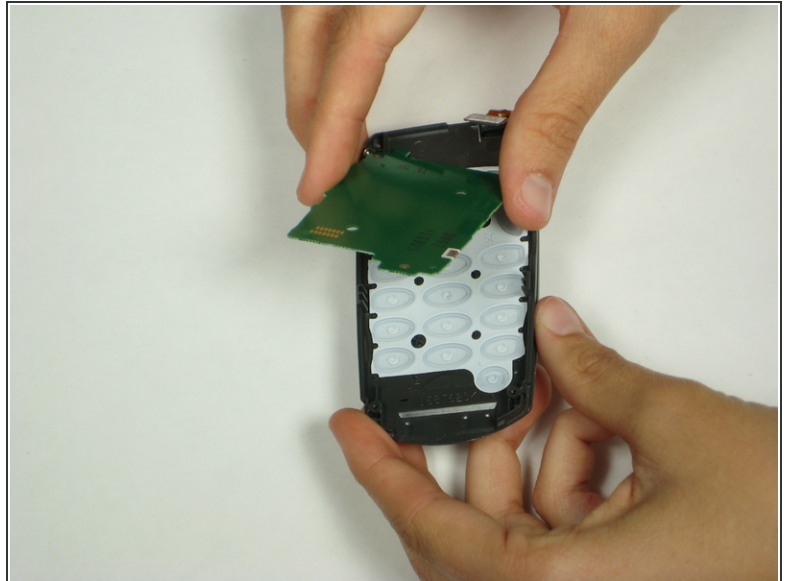

- Once logic board is removed lift the green keypad sensor for the front plate.

Step 9 — Keypad



- To replace keypad buttons, lift off white tray containing buttons.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-18 02:44:30 AM.